

# DP6155



## QUIET OPERATION

Less than 34dB, for whisper-quiet operation

## LIGHTWEIGHT FLEXIBILITY

At 7.5 lbs (3.4 kg) it easily moves from room to room

## MULTIPLE INPUTS

Connect up to five different sources simultaneously with single-button transitions between media sources

## EXCEPTIONAL IMAGES

450:1 contrast ratio coupled with native XGA resolution display detailed images with clarity

## HIGH BRIGHTNESS


2000 ANSI lumens for clear, vibrant images that will dazzle your audience

## DIGITAL VISUAL INTERFACE (DVI)



Allows pure digital connectivity for emerging standards; two additional analog computer inputs support analog connections

# DP6155

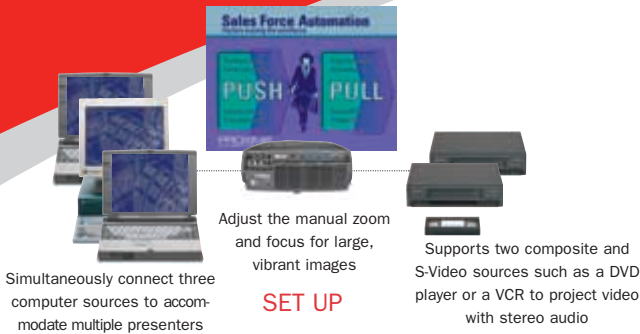

## SET UP

## FEATURES

The digital DP6155 offers unsurpassed data connectivity with Digital Visual Interface (DVI) connectivity for exceptional performance in any environment. This feature-packed projector makes projecting in small conference rooms a snap. Its quiet operation, high brightness, XGA resolution, digital keystone correction, weight and high contrast ratio make it the perfect solution for those who need flexibility and outstanding performance.

- Quiet operation – at less than 34dB it minimizes distractions and maximizes audience interaction
- High brightness – at 2000 ANSI lumens and XGA resolution, images are clear and detailed in ambient room lighting
- Unsurpassed DVI connectivity, with zoom and focus adjustments, and digital keystone correction make the DP6155 flexible in any environment
- Multiple video and data inputs allow for seamless switching between presenters and media sources
- Intuitive on-screen menu available in 10 languages
- 2,000 hour lamp life yields lower cost of ownership
- Monitor loop-through feature enables the user to face their audience and see their presentation on-screen
- Simplified set-up and ease-of-use features make the DP6155 easy to move from room to room, which stretches budget dollars

### Model DP6155 Ships With:

- **BatMouse III remote control with batteries and laser pointer**
- **U.S. and European power cords**
- **Product documentation**
- **VGA cable, DVI digital data cable, audio/video cable, USB mouse cable, mouse cable and adapters for PS/2 and MS serial, audio cable**
- **Soft carrying case**
- **Lens cap**

## ORDERING INFORMATION

### Model Number

DP6155 For worldwide use

### Optional Accessories

CASE-183	Shipping Case
CASE-801	Samsonite Deluxe Travel Case
HW-EBEAM	eBeam (Web Enabled Electronic Meeting Assistant)
HW-PORTSCR40	Portable Screen 40" Diagonal
HW-PORTSCR50	Portable Screen 50" Diagonal
HW-WALLSCR84	Pull Down Screen 84" Diagonal
HW-RFPOCKTPNT	Pocket Point RF Remote Control w/Laser Pointer (US, Mexico, Canada only)
SP-LOCK	PC Guardian Projector Lock
HW-DLXSCRN	Deluxe Insta-Theater Screen 60" Diagonal
LAMP-031	Replacement Lamp, 2000 hours



## TECHNICAL SPECIFICATIONS

Native Resolution	• XGA (1024 x 768)
Display Technology	• 3 x .9" polysilicon LCDs with MLA (Micro Lens Array)
Input Sources	• 3 computer, 1 S-Video, 1 composite video, 1 video audio, 1 USB mouse, 1 PS/2 mouse, 1 RS-232
Output Sources	• 1 monitor (VGA 15-pin HDDSUB), 1 audio (2 x RCA L/R), wired remote (2.5 mm mini-jack)
Computer Compatibility	• IBM PC or compatibles, Apple Macintosh with video outputs
Video Compatibility	• S-Video, composite video, PAL, PAL-M, PAL-N, SECAM, NTSC 3.58/4.43
Brightness	• 2000 ANSI lumens
Brightness Uniformity	• Greater than 75%
Contrast Ratio	• 450:1 full on/full off
Number of Colors	• 16.7 million
H-Sync Range	• 15 - 100 kHz
V-Sync Range	• 43 - 130 Hz
Dot Clock	• 160 MHz analog; 112 MHz digital
Digital Keystone Correction	• ±15° adjustable
Projection Lens	• f= 36 - 47 mm • F/1.8 - 2.1 • 1.3:1 Manual zoom and focus
Throw Ratio	• 1.9 - 2.5:1 (distance:width)
Minimum Projection Distance (from screen)	• 1.3 m - 10 m
Aspect Ratio	• Std: 4:3 - wide: 16:9
Image Size (diagonal)	• 20" - 260" (580 mm - 6604 mm)
Projection Methods	• Front, rear, ceiling
Audio	• 2 x 1 Watt stereo
Control	• Via on-board menu or remote control
Communication	• RS-232 Serial
Lamp	• 200 Watt UHP
Lamp Life	• 2000 hours
Dimensions (with lens)	• 9.8" (W) x 3.9" (H) x 12.6" (L) • 249 mm (W) x 98 mm (H) x 320 mm (L)
Weight	• 7.5 lbs (3.4 kg)
Power Consumption	• Greater than 220 Watts
Power Supply	• 100V - 240V at 50 - 60 Hz
Operating Temperature	• 50° - 95° F (10° - 35°C)
Menu Languages	• English, French, Spanish, Italian, Portuguese, German, Norwegian, Dutch, simplified Chinese, traditional Chinese, Japanese
Audible Noise	• Less than 34dB
Approvals	• CE, UL, cUL, FCC Class A
Lamp Warranty	• 90 days or 500 hours
Warranty	• Two years on parts and labor. • One year ProXchange (available in U.S., Canada, EU Countries, Norway, Switzerland)

## PROJECTION DISTANCES/IMAGE SIZES

Projection Distance		Image Size (Diagonal)			
		Minimum		Maximum	
4.3'	1.3 m	2.5'	0.7 m	3.1'	0.9 m
5.0'	1.5 m	2.9'	0.9 m	3.6'	1.1 m
10.0'	3.0 m	5.8'	1.8 m	7.3'	2.2 m
15.0'	4.6 m	8.6'	2.6 m	10.9'	3.3 m
20.0'	6.1 m	11.5'	3.5 m	14.5'	4.4 m
30.0'	9.1 m	17.3'	5.3 m	21.8'	6.6 m
32.8'	10.0 m	18.9'	5.8 m	23.8'	7.3 m

[www.proxima.com](http://www.proxima.com) [www.infocus.com](http://www.infocus.com)

**InFocus Corporate Headquarters, U.S.:** 27700B SW Parkway Avenue  
Wilsonville, Oregon 97070-9215  
Phone: 503-685-8888 • 1-800-294-6400 • Fax: 503-685-8887

**In Europe:** Olympia 1 • NL-1213 NS Hilversum, The Netherlands  
Phone: (31) 35 6474000 • Fax: (31) 35 6423999  
Freephone: 008000 4636287 (008000 INFOCUS)

**In Asia:** 238A Thomson Road • #18-01/04 Novena Square  
Singapore 307684 • Telephone: (65) 334-9005 • Fax: (65) 334-4525

Proxima is a registered trademark of InFocus Corporation.  
Other trademarks are property of their respective owners. ©2001 InFocus Corporation.  
All rights reserved. 08/01 815-0003-00 DP6155\_DS\_E.qxd